

Circular LED luminaires suitable for wall or ceiling mounting

A perfect balance between aesthetics and performance, the Clara 360 adds a sophisticated element to interior and exterior lighting schemes. Clara 360 uses medium power LEDs mounted onto specially designed circuit boards which provide excellent thermal management and LED failure protection.

A super-efficient reflector directs the light out of the luminaire and achieves 132.6 lumens per circuit watt. Standard, dimming, SmartScan and emergency versions are available. Clara 360 is rated IP54 suitable for use indoors and outside, with an excellent IK09 impact rating. Please also see Clara 90 and Clara 180.

Applications: corridors, stairwells, reception areas, meeting rooms, outdoor under canopy, wall mounted external.

- IP54 rating ensures suitability for both indoor and outdoor use
- Optional 3 W LED backlight (RGB or white)
- Emergency light provided by two integral 1 W high power LEDs
- SmartScan wireless technology removes the need for control cabling. Ideal for retro-fit



IP54

IK09

132.6 LL/CW

SMARTSCAN

LUXGUARD

Specification

| | | | |
|---------------|---------|-------------------------------|------|
| Mounting | Surface | IP rating | IP54 |
| Impact rating | IK09 | Max presence detection height | 8 m |

Lighting

| | | | |
|----------|---------------------|--------------|----------|
| Optic | Satin sparkle cover | Lumen output | 3,050 lm |
| Efficacy | 132.6 LL/CW | | |

Emergency data

| | | | |
|------------------------|---------|-----------------------|-----------------------------|
| Emergency lumen output | 205 lm | Emergency type | Maintained |
| Emergency duration | 3 hours | Battery specification | Nickel Metal Hydride (NiMH) |

Power

| | | | |
|-----------|------|---------------|------|
| LED power | 20 W | Circuit power | 23 W |
|-----------|------|---------------|------|





LED characteristics

| | | | |
|--------------------|-----------------|--------------------|--------|
| CRI | 80+ | Colour temperature | 4000 K |
| Rated life (hours) | 100 K - L80/B10 | | |

Compliance

| | | | |
|--------------|-----|----|-----|
| UKCA | Yes | CE | Yes |
| C-Tick (Aus) | Yes | | |

Dimensions

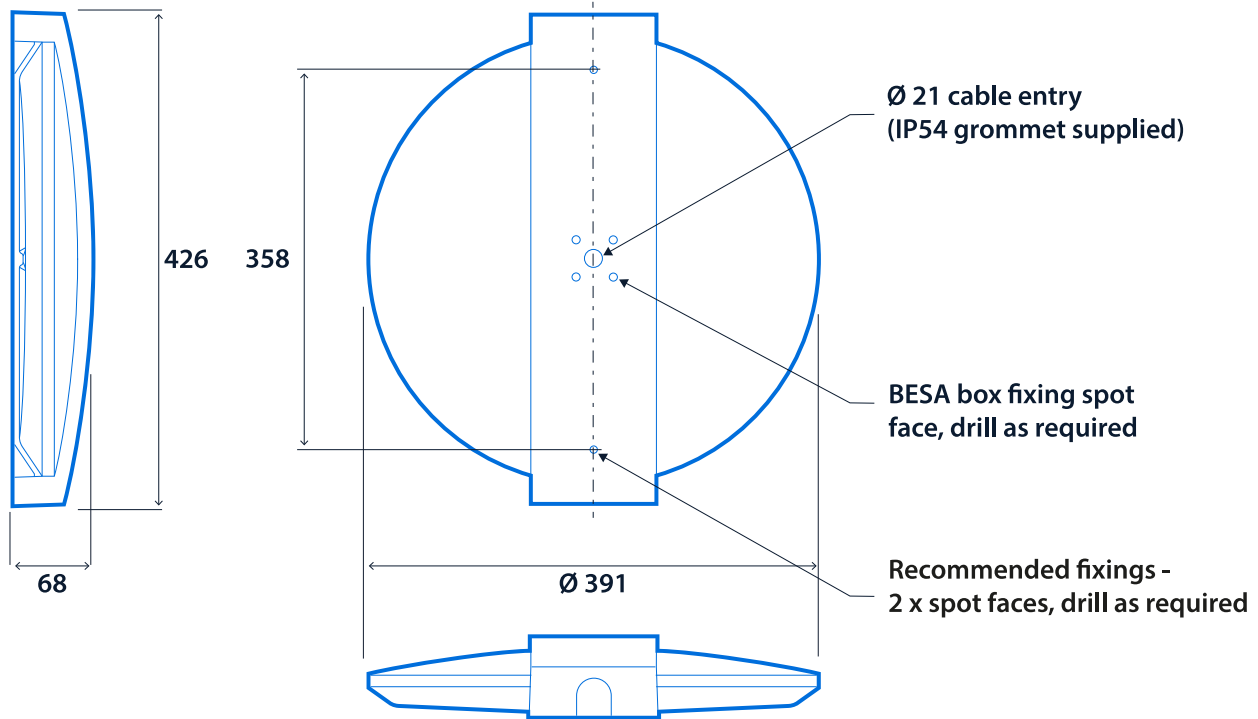



Click or scan here
View Clara 360 variants using
our online filtering tool



Information is correct as of 29 Dec 2024, however must not be interpreted as a guarantee of individual product performance and/or characteristics. We reserve the right to alter specifications and designs without prior notice.