

## Master colour temperature control and web interface for ColourActive luminaires

Transmits colour temperature control commands from the SmartScan web server.

Applications: For use on all ColourActive schemes.

- Polycarbonate body finished white (RAL9016), silicone keypad
- Central control for ColourActive luminaires
- Communicates with the SmartScan website using GSM mobile telecommunications
- Wireless control of incremental shifts in colour temperature governed by settings on the SmartScan website

Notes: A ColourActive Gateway only provides colour temperature control. If energy monitoring and status information feedback is required an additional SmartScan Gateway is required.




### Specification

IP rating **IP65**


### Compliance

UKCA	Yes	CE	Yes
C-Tick (Aus)	Yes		

## Dimensions

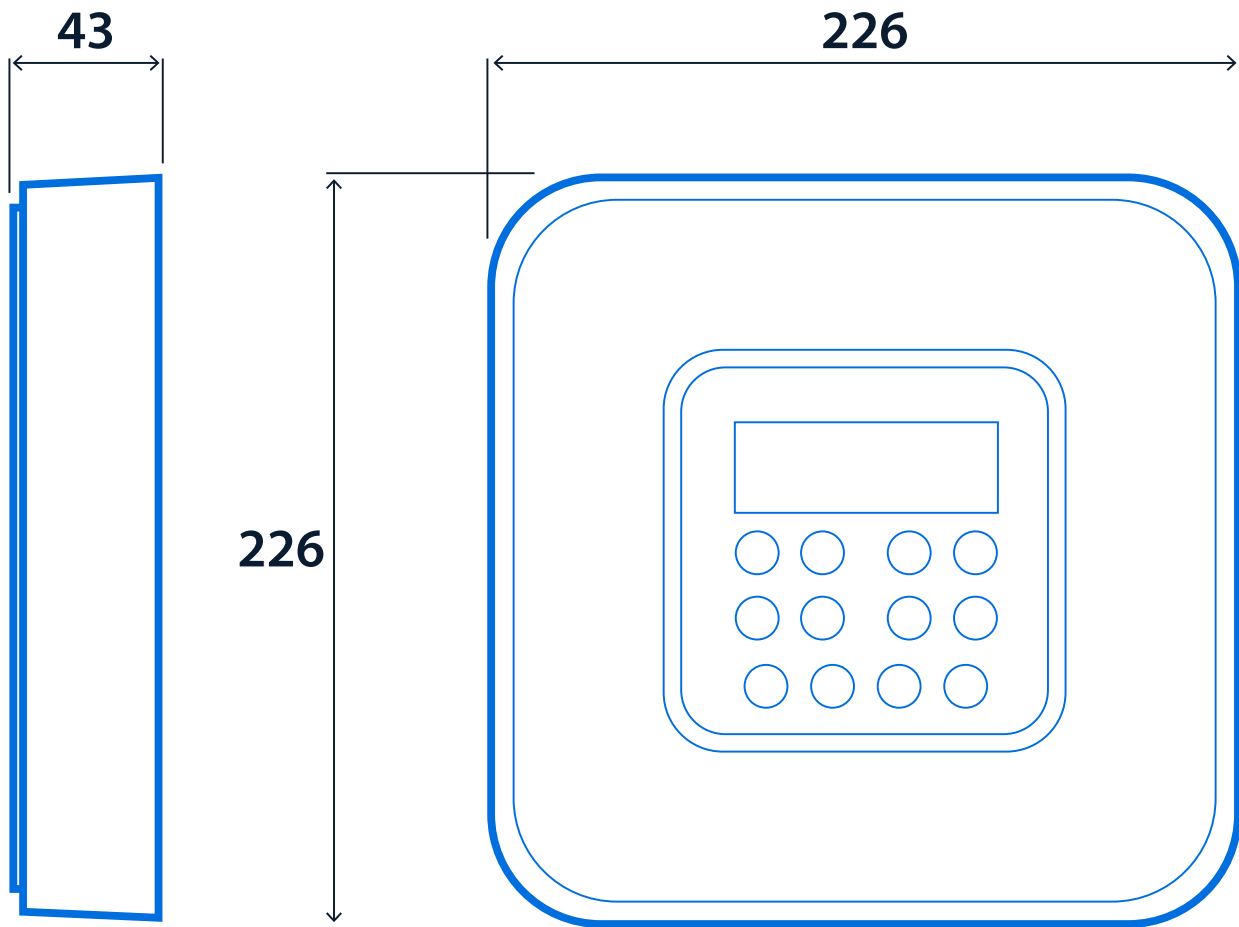

**Click or scan here**  
View ColourActive Gateway  
variants using our online  
filtering tool



Information is correct as of 29 Dec 2024, however must not be interpreted as a guarantee of individual product performance and/or characteristics. We reserve the right to alter specifications and designs without prior notice.