

Circular anti-ligature recessed LED downlighters

Circular recessed anti-ligature luminaires. Choice of clear or satin 4 mm thick polycarbonate diffuser secured via strong spun steel ring using tamper-resistant pin Torx screws. Maintained emergency versions available.

- Anti-pick sealant can be used to seal the mounting bezel whilst still allowing the luminaire to be removed for maintenance
- Cover secured using tamper-resistant T20 pin Torx screws
- Supplied with remote gear unit fitted with 2 m supply lead
- SmartScan Radar versions with sensor discretely hidden behind the cover



IP65 (IP20 above ceiling)

IK10

Up to 106.5 LL/CW

SMARTSCAN

LUXGUARD

Specification

Mounting	Recessed	IP rating	IP65 (IP20 above ceiling)
Impact rating	IK10		

Lighting

Optic	Clear cover Satin cover	Lumen output	835 lm - 1,940 lm
Efficacy	Up to 106.5 LL/CW		

Emergency data

Emergency lumen output	260 lm - 330 lm	Emergency type	Maintained
Emergency duration	3 hours	Battery specification	Nickel Metal Hydride (NiMH)

Power

LED power	8 W - 16 W	Circuit power	10 W - 19 W
-----------	------------	---------------	-------------




LED characteristics

CRI	80+	Colour temperature	4000 K
Rated life (hours)	63 K - L80/B10		

Compliance

UKCA	Yes	CE	Yes
C-Tick (Aus)	Yes		

Dimensions

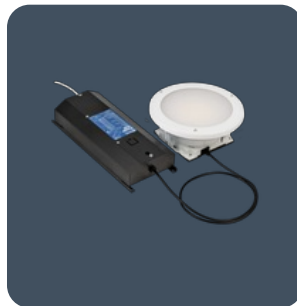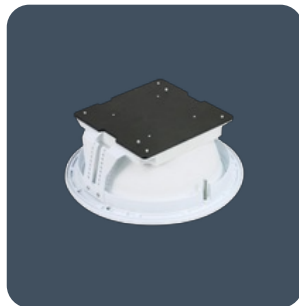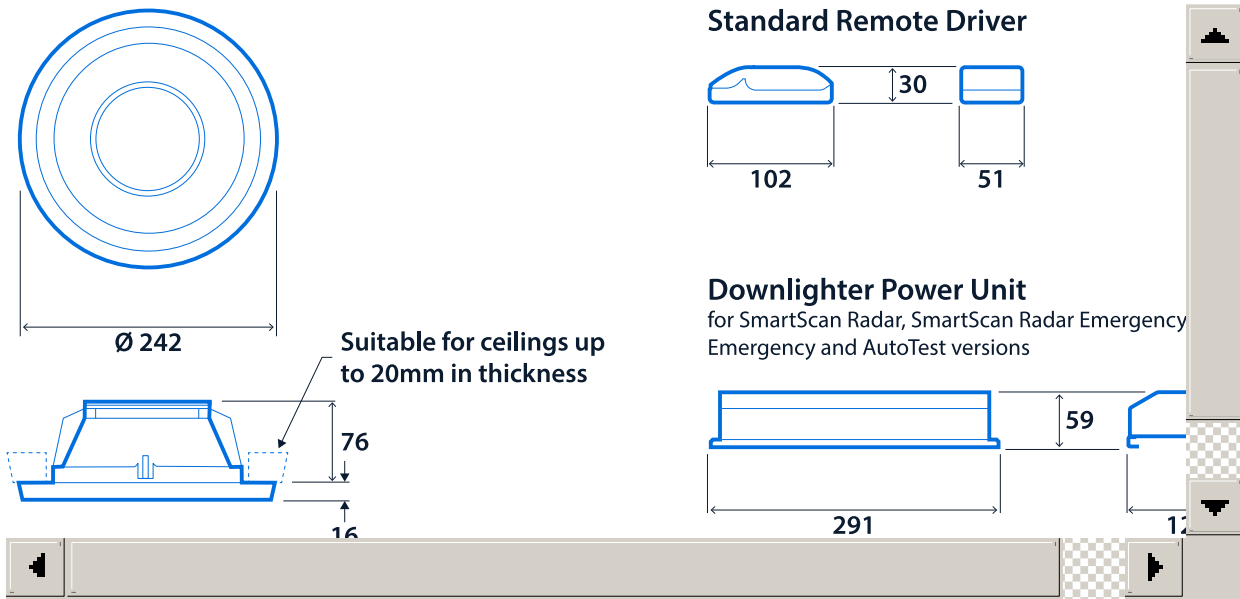

Click or scan here
 View G3 AL variants using our
 online filtering tool

Information is correct as of 29 Dec 2024, however must not be interpreted as a guarantee of individual product performance and/or characteristics. We reserve the right to alter specifications and designs without prior notice.