

## Supreme performance LED luminaires for indoor sports applications

The Visio Sport is rated IK10 and complies with the requirements of DIN EN 18032 Part 3 and DIN VDE 0710 Part 13 for ball impact resistance. Excellent glare control ensures the luminaire is ideal for use in indoor sports applications. Extremely long life, fast installation and easy maintenance of integral emergency versions are key features of Visio Sport.

SmartScan versions for use up to 8 m mounting height. SmartScan "wireless" versions eliminate the requirement for control cabling often associated with retro-fit installations.

Applications: Indoor sports, leisure centres.

- Extruded aluminium body with die-cast ends and UV stabilised polycarbonate cover
- Up to 32,810 lumen output
- Clip-fit stainless steel mounting brackets with locking kit (supplied)
- Smooth wipe clean surfaces, no dust traps
- Ball impact resistant to DIN EN 18032 Part 3 and DIN VDE 0710 Part 13
- Fitted with 2 m lead
- SmartScan wireless technology removes the need for control cabling. Ideal for retro-fit



Up to IP66

Up to IK10

Up to 154.4 LL/CW

SMARTSCAN

LUXGUARD

### Specification

|                               |            |              |                   |
|-------------------------------|------------|--------------|-------------------|
| Mounting                      | Surface    | IP rating    | Up to IP66        |
| Impact rating                 | Up to IK10 | Nominal size | 800 mm<br>1400 mm |
| Max presence detection height | 8 m        |              |                   |

### Lighting

|          |                   |              |                       |
|----------|-------------------|--------------|-----------------------|
| Optic    | Clear cover       | Lumen output | 15,925 lm - 32,810 lm |
| Efficacy | Up to 154.4 LL/CW |              |                       |

### Emergency data

|                        |                 |                       |                             |
|------------------------|-----------------|-----------------------|-----------------------------|
| Emergency lumen output | 910 lm - 950 lm | Emergency type        | Maintained                  |
| Emergency duration     | 3 hours         | Battery specification | Nickel Metal Hydride (NiMH) |

### Power

|           |               |               |               |
|-----------|---------------|---------------|---------------|
| LED power | 101 W - 212 W | Circuit power | 110 W - 217 W |
|-----------|---------------|---------------|---------------|



### LED characteristics

|                    |                 |                    |        |
|--------------------|-----------------|--------------------|--------|
| CRI                | 80+             | Colour temperature | 4000 K |
| Rated life (hours) | 100 K - L70/B10 |                    |        |

## Compliance

|              |     |                        |  |
|--------------|-----|------------------------|--|
| UKCA         | Yes | CE                     | Yes  |
| C-Tick (Aus) | Yes | Ball impact resistance | DIN EN 18032 Part 3 and DIN VDE 0710 Part 13 |

## Dimensions

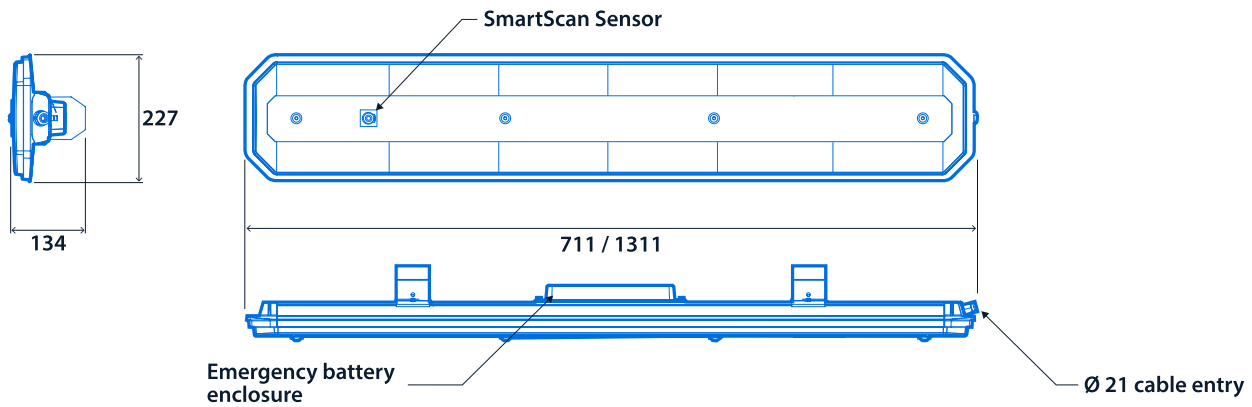

**Click or scan here**  
View Visio Sport variants using  
our online filtering tool



Information is correct as of 01 Jan 2025, however must not be interpreted as a guarantee of individual product performance and/or characteristics. We reserve the right to alter specifications and designs without prior notice.